


RELOCK P/N	DIM A	TOLERANCE
CG-12-04-6	6	±0.125
CG-12-04-12	12	±0.125
CG-12-04-18	18	±0.125
CG-12-04-24	24	±0.125
CG-12-04-30	30	±0.125
CG-12-04-36	36	±0.125
CG-12-04-48	48	±0.125
CG-12-04-54	54	±0.125
CG-12-04-60	60	±0.125
CG-12-04-72	72	±0.125
CG-12-04-84	84	±0.125
CG-12-04-96	96	±0.125
CG-12-04-102	102	±0.188
CG-12-04-108	108	±0.188
CG-12-04-120	120	±0.188
CG-12-04-126	126	±0.188
CG-12-04-144	144	±0.188
CG-12-04-150	150	±0.188
CG-12-04-168	168	±0.188
CG-12-04-180	180	±0.188
CG-12-04-186	186	±0.188
CG-12-04-192	192	±0.188
CG-12-04-240	240	±0.25
CG-12-04-246	246	±0.25
CG-12-04-252	252	±0.25
CG-12-04-300	300	±0.50
CG-12-04-360	360	±1.0

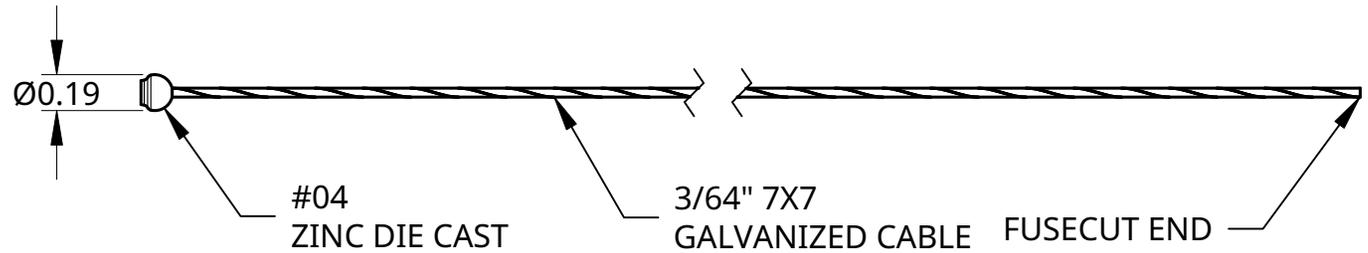

**NOTES:**

1. CABLE TO U.S. FEDERAL SPECIFICATION RR-W-410
2. ZINC DIE CAST TO BE ZAMAK 5
3. MINIMUM BREAK STRENGTH 270LBS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES .XX = ±.01 .XXX = ±.005 ANGLES = ±1° BREAK ALL EDGES 0.005 MIN SURFACE FINISH 63 MICRO INCHES DIMENSIONS APPLY AFTER FINISH CONCENTRICITY = 0.025 TIR		NAME	DATE	<b>RELOCK SUSPENSION LLC</b>		
	DRAWN					TITLE
	CHECKED			3/64" GALVANIZED 7X7 CABLE W/ #04 ZINC DIE CAST PARTIAL BALL		
	APPROVED					
DO NOT SCALE DRAWING				SIZE	DWG NO.	REV.
BREAK ALL SHARP EDGES AND REMOVE BURRS				A	CG-12-04-XXX	
THIRD ANGLE PROJECTION	MATERIAL	FINISH		SCALE	WEIGHT	SHEET
	VARIOUS			1:1		1 of 1