



G16-3W

MULTI WAY G16 GRIPPERS


Tool less adjustable cable suspension hardware for quick and accurate installs. For multiple suspension applications including lighting, signage, art, acoustical, and displays.

FEATURES/BENEFITS:

- 1) Fast & easy installation. Adjusts quickly by hand.
- 2) Strength & security. As load increases mechanism grips tighter to cable. 5:1 safety factor.
- 3) All metal parts. No plastic components.
- 4) Great Looks. Nickel plated machined brass.
- 5) Allows for single mounting at ceiling and 3 mounting points to fixture or object being suspended.




DIMENSIONS:

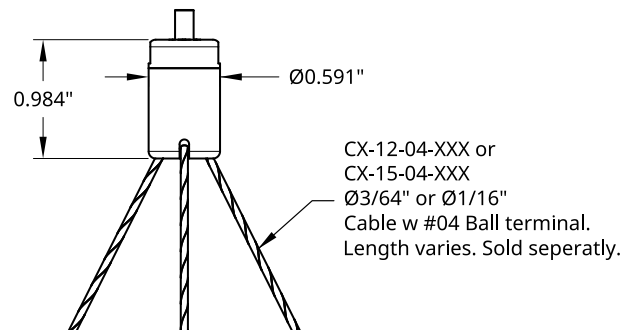


INSTALLATION & USAGE:

After assembling secondary cables screw gripper into multi cable housing connector.

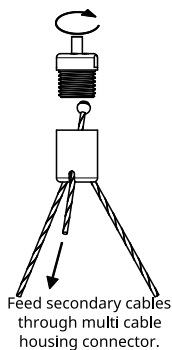


Feed primary cable into gripper.


Plunger



NOTE: FOR SECONDARY CABLES USE CABLE WITH #04 BALL ENDING ONLY



$\frac{1}{2}$ " minimum of **PRIMARY** cable to protrude from the bottom of housing after adjusting or cutting excess cable.

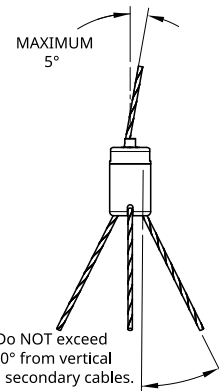

SUBMITTAL INFORMATION:

MATERIAL

- Gripper and housing: UNS C3600 Brass Plating: Bright Nickel
- Ball Bearings: Brass
- Spring: 304 Stainless Steel

7x7 Galvanized Cable		
Cable Diameter	3/64"	1/16"
Working Load Limit (lbs)	30	60

7x7 304 Stainless Steel Cable		
Cable Diameter	3/64"	1/16"
Working Load Limit (lbs)	25	50

***WLL 5:1 Safety Factor. WLL based on primary cable strength.**

NOT suitable for indoor pools or other chlorinated environments.