

RELOCK SUSPENSION



KI-CG16-Y18TG-X2-XXX

KITS INDUSTRIALS

Tool less adjustable cable suspension hardware for quick and accurate installs. For multiple suspension applications including lighting, electrical, signage, acoustical, and displays.

FEATURES/BENEFITS:

- 1) Fast & easy installation. Adjusts quickly by hand. 2) Strength & security. As load increases mechanism grips tighter to cable. 5:1 safety factor. 3) All metal parts. No plastic components. 4) Y cable configuration for wide high bay fixtures.

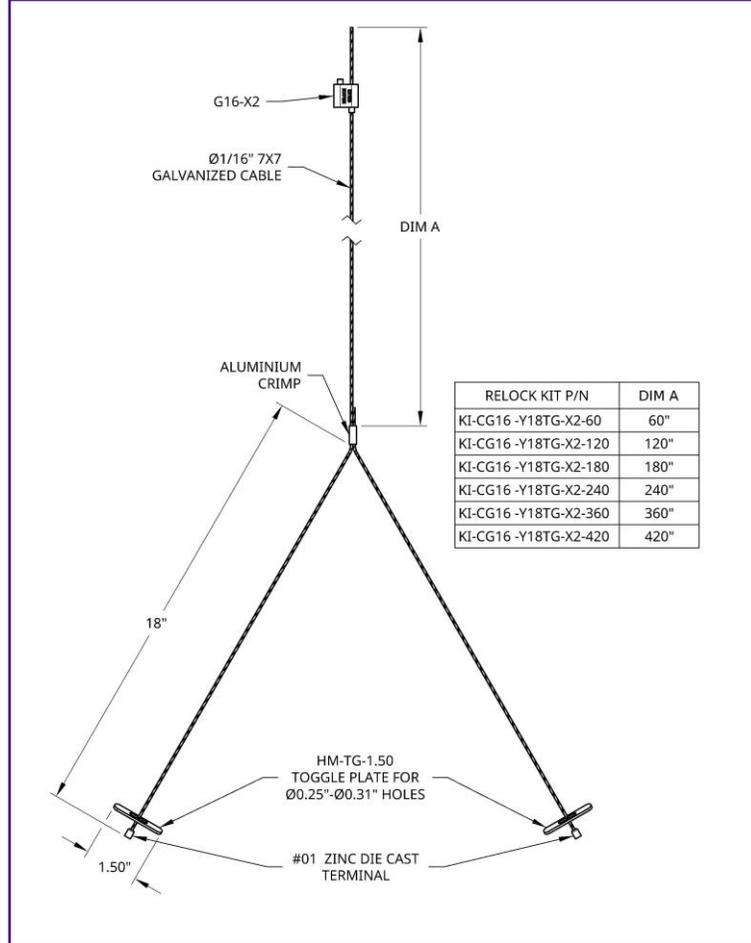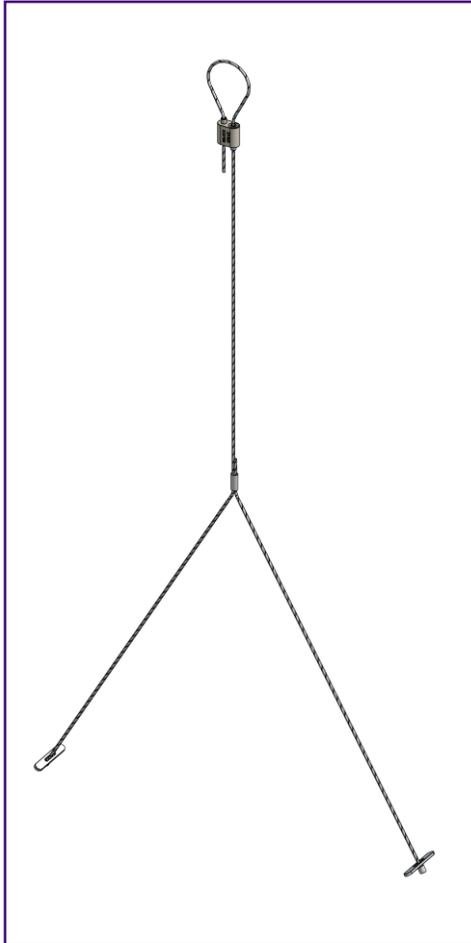

SUBMITTAL INFORMATION:

Kit Includes 2 each G16-X2 looping grippers and 2 each Y toggle cable assemblies per package.

GRIPPER MATERIAL & SPECIFICATION

- Housing, Pressure Plate, & Plunger Release: UNS C3600 Brass Plating: Bright Nickel
- Ball Bearings: Brass
- Spring: 304 Stainless Steel

TOGGLE MATERIAL & SPECIFICATION

- Toggle: Steel Plating: Zinc

CABLE MATERIAL & SPECIFICATION

- Ø 1/16" 7x7 Galvanized Steel

DIE CAST MATERIAL & SPECIFICATION

- Zinc Zamak 5

ASSEMBLY WORKING LOAD LIMIT: 75LBS. WLL 5:1 Safety Factor

NOT suitable for indoor pools or other chlorinated environments.