

# RELOCK SUSPENSION

## G12-M8-TF

## RELOCK SUSPENSION


Tool less adjustable cable suspension hardware for quick and accurate installs. For multiple suspension applications including lighting, signage, art, acoustical, and displays.

### FEATURES/BENEFITS:


- 1) Fast & easy installation. Adjusts quickly by hand.
- 2) Strength & security. As load increases mechanism grips tighter to cable. 5:1 safety factor.
- 3) All metal parts. No plastic components.
- 4) Great Looks. Nickel plated machined brass.



### DIMENSIONS:

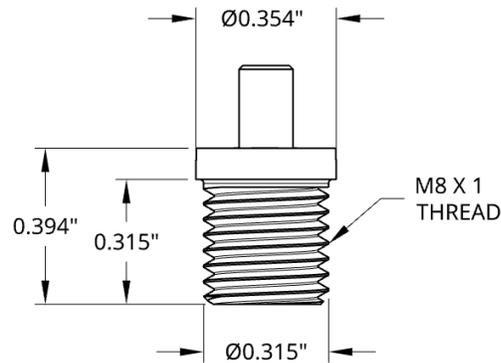

### INSTALLATION:

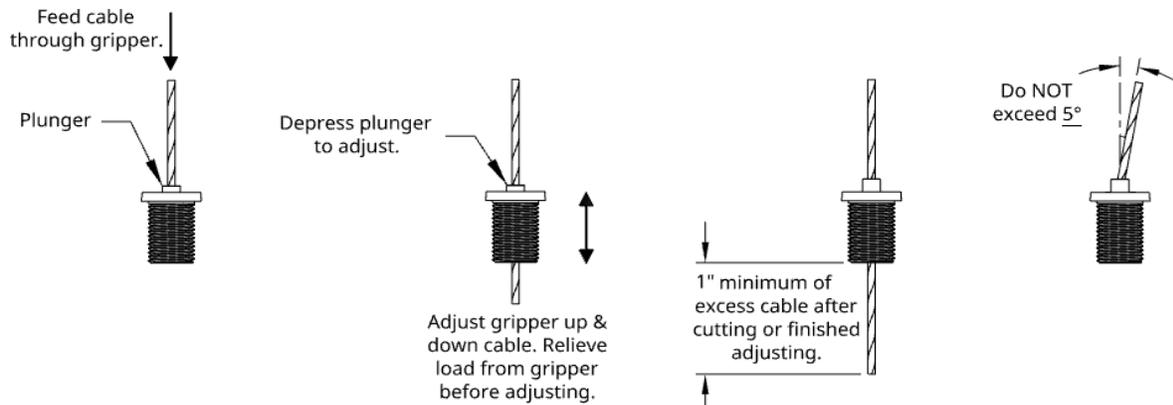

### SUBMITTAL INFORMATION:

#### MATERIAL

- Housing, Pressure Plate, & Plunger Release: UNS C3600 Brass      Plating: Bright Nickel
- Ball Bearings: Brass
- Spring: 304 Stainless Steel

| 7x7 Galvanized Cable     |       |       |
|--------------------------|-------|-------|
| Cable Diameter           | 1.0mm | 3/64" |
| Working Load Limit (lbs) | 25    | 30    |

| 7x7 304 Stainless Steel Cable |       |       |
|-------------------------------|-------|-------|
| Cable Diameter                | 1.0mm | 3/64" |
| Working Load Limit (lbs)      | 20    | 25    |

**\*WLL 5:1 Safety Factor**

**NOT** suitable for indoor pools or other chlorinated environments.

