


RELOCK SUSPENSION

KA-NF2W-CXXX-XXX KITS ARCHITECTURAL

Ceiling mount cable suspension hardware for quick and accurate installs. For multiple suspension applications including lighting, electrical, signage, acoustical, and displays.

FEATURES/BENEFITS:
 1) Fast & easy installation. Coupler joins cable to multiple ceiling hardware options with standard 1/4-20 thread. 2) Strength & security. 3) All metal parts. No plastic components. 4) Aesthetics. Canopy covers unattractive ceiling hardware.

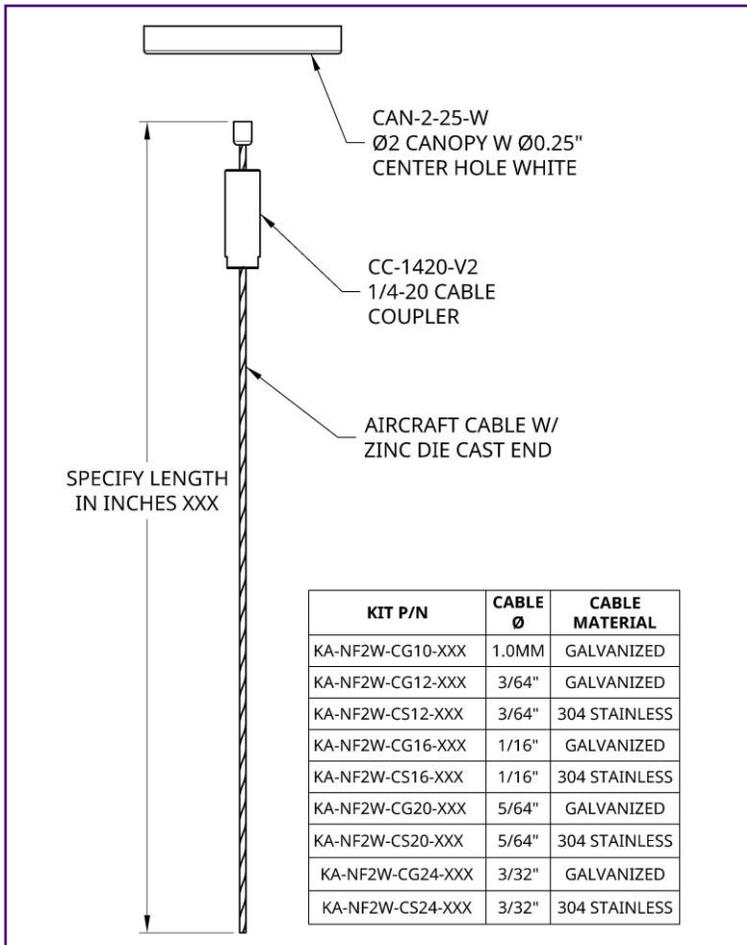

KIT P/N	CABLE Ø	CABLE MATERIAL
KA-NF2W-CG10-XXX	1.0MM	GALVANIZED
KA-NF2W-CG12-XXX	3/64"	GALVANIZED
KA-NF2W-CS12-XXX	3/64"	304 STAINLESS
KA-NF2W-CG16-XXX	1/16"	GALVANIZED
KA-NF2W-CS16-XXX	1/16"	304 STAINLESS
KA-NF2W-CG20-XXX	5/64"	GALVANIZED
KA-NF2W-CS20-XXX	5/64"	304 STAINLESS
KA-NF2W-CG24-XXX	3/32"	GALVANIZED
KA-NF2W-CS24-XXX	3/32"	304 STAINLESS

SUBMITTAL INFORMATION:
 Kit includes 1 each Ø2" Ceiling canopy, 1/4-20 cable coupler & cable with zinc die cast per package.

CANOPY MATERIAL & SPECIFICATION

- 22 Gauge Steel

Finish: White powder coat

CABLE COUPLER MATERIAL & SPECIFICATION

- UNS C3600 Brass

Plating: Bright Nickel

CABLE MATERIAL & SPECIFICATION

- 7x7 Galvanized Steel or 304 Stainless Steel

DIE CAST MATERIAL & SPECIFICATION

- Zinc Zamak 5

NOT suitable for indoor pools or other chlorinated environments.