

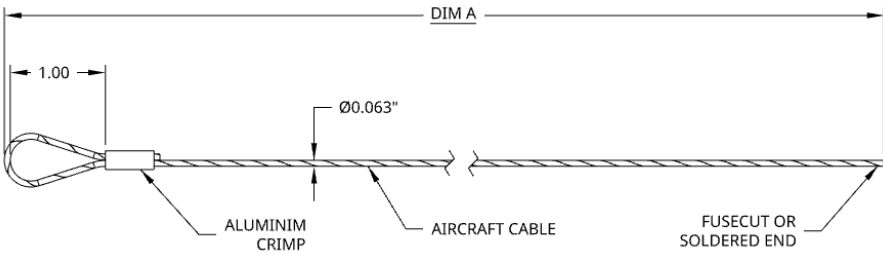

# CG-16-08-XXX

# Ø1/16" GALVANIZED CABLE

Recommended to use as a sling or standard loop attachment for quick and accurate installs. For multiple suspension applications including lighting, signage, art, acoustical, and displays.

### FEATURES/BENEFITS:

- 1) Light weight and strong. 2) Flexible and easy to work with. 3) Precut lengths with looped ends install quickly and easily to eliminate need to cut and crimp cable in the field. 4) Sealed ends make it easy to feed through grippers.

RELOCK PART NUMBER	DIM A	TOLERANCE
CG-16-08-48	48	±0.125
CG-16-08-60	60	±0.125
CG-16-08-96	96	±0.125
CG-16-08-120	120	±0.188
CG-16-08-144	144	±0.188
CG-16-08-180	180	±0.188
CG-16-08-240	240	±0.25

Standard cable lengths shown. Other cable lengths maybe available open request. Additional costs may occur with non-standard cable lengths.

### SUBMITTAL INFORMATION:

#### TECHNICAL DATA:

- Cable diameter Ø1/16"
- Cable strand configuration 7x7
- Cable to ASTM A1023 specification

#### MATERIAL:

- Crimp: Aluminum
- Aircraft cable: Galvanized Steel

Breaking strength of loop with crimp is the same as the full breaking strength of the cable alone. Cable breaking strength of cable alone is higher than breaking strength of cable and grippers combined. Breaking strength is 5 times the working load limit (WLL). The WLL limit should never be exceeded. To determine WLL please refer to gripper WLL with the particular cable size you are using.

**NOT** suitable for use with indoor pools or other chlorinated environments.